


14143**Female JIC 37° - Swivel - 90° Elbow - Long Drop**


ISO 12151-5

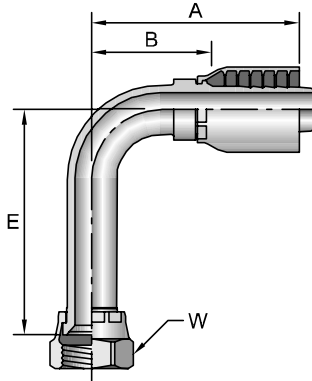


# Part Number					A		E				B	
	Thread inch		Hose I.D. inch		inch	mm	inch	mm	inch	inch	mm	
14143-4-4	1/4	7/16x20	1/4	1.96	50	1.81	46	9/16	1.21	31		
14143-5-4	5/16	1/2x20	1/4	1.93	49	1.80	46	5/8	1.18	30		
14143-6-6	3/8	9/16x18	3/8	2.27	58	2.18	55	11/16	1.27	32		
14143-8-6	1/2	3/4x16	3/8	2.56	65	2.43	62	7/8	1.56	40		
14143-8-8	1/2	3/4x16	1/2	2.62	67	2.52	64	7/8	1.36	35		
14143-10-8	5/8	7/8x14	1/2	2.78	71	2.58	66	1	1.52	39		
14143-10-10	5/8	7/8x14	5/8	3.16	80	2.58	66	1	1.75	44		
14143-12-12	3/4	1-1/16x12	3/4	3.49	89	3.74	95	1-1/4	2.05	52		
14143-14-12	7/8	1-3/16x12	3/4	3.38	86	3.93	100	1-3/8	1.95	50		
14143-16-16	1	1-5/16x12	1	3.90	99	4.32	110	1-1/2	2.31	59		
14143-20-20	1-1/4	1-5/8x12	1-1/4	4.39	112	5.28	134	2	2.73	69		

14V43**Female JIC 37° - Swivel - 150° Elbow**


ISO 12151-5

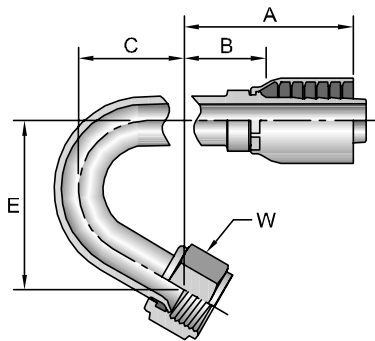

#				A		C		E			B	
Part Number	Thread		Hose I.D.	inch	mm	inch	mm	inch	mm	inch	inch	mm
14V43-6-4	3/8	9/16x18	1/4	2.89	73	1.36	11/16	1.97	50	11/16	2.16	55

10443**Male SAE 45° - Rigid**

# Part Number	 Thread		 Hose I.D.	A		 H	B	
	inch		inch	inch	mm	inch	inch	mm
10443-6-6	3/8	5/8x18	3/8	2.21	56	3/4	1.21	31
10443-12-12	3/4	1-1/16x14	3/4	3.20	81	1-1/8	1.77	45

10843**Female SAE 45° - Swivel**

# Part Number								
	Thread inch		Hose I.D. inch		A inch mm		B inch mm	
10843-6-4	3/8	5/8x18	1/4	2.11 54	3/4	3/4	1.36	35
10843-6-6	3/8	5/8x18	3/8	2.38 60	3/4	3/4	1.35	34
10843-12-12	3/4	1-1/16x14	3/4	3.17 81	1-1/16	1-1/4	1.73	44

Notch on nut signifies SAE 45° flare.