

SuperKlean™

Environmentally Exceptional Washdown Products

Standard Spray Nozzles

- Durable rubber covers. Fully insulated.
- Nozzles are available in brass (3 lbs), aluminum (1.69 lbs), and stainless steel (2.78 lbs)
- All components are interchangeable with similar brands.
- 1/2" female NPT inlet.

150B / 150A / 150S

Inlet/Outlet Diameter: 1/2" NPT

Nozzle Body: Brass, Stainless Steel, Or Aluminum. Epoxy resin coated.

Cartridge: Brass or Stainless Steel

Weight: 3 / 2 / 3.12 lbs

Recommended Operative Conditions

Maximum Pressure: 150 PSI

Maximum Temperature: 200 °F (93 °C)

Inlet Pressure (PSIG)	Flow Rate (GPM)
-----------------------	-----------------

High Flow

25	4.39
50	6.54
75	8.18
100	9.56
125	10.83
150	11.89

Low Flow

25	2.93
50	3.86
75	4.91
100	5.78
125	6.71
150	7.19

*Low flow rates can be achieved with the purchase of flow restrictor adapter (Part: 8-FR-NPT)





SuperKlean™

Environmentally Exceptional Washdown Products

Standard Spray Nozzles

Part #	Description
1-B	Nozzle body, brass, one piece, epoxy resin coated
1-A	Nozzle body, aluminum, one piece, epoxy resin coated
1-S	Nozzle body, stainless steel, one piece, epoxy resin coated
2	Lever, stainless steel
3	Lever bolt & nut (bushing included), stainless steel
4-DB	Nozzle cover, dark blue
4-LB	Nozzle cover, light blue
4-G	Nozzle cover, gray
4-R	Nozzle cover, red
4-W	Nozzle cover, white
5-S	Cage or "thrust collar", stainless steel
6	Lock screw or "end adapter", stainless steel
7-B	Cartridge or "barrel assembly," brass, contains all working parts
7-S	Cartridge or "barrel assembly," 304 stainless steel, contains all working parts

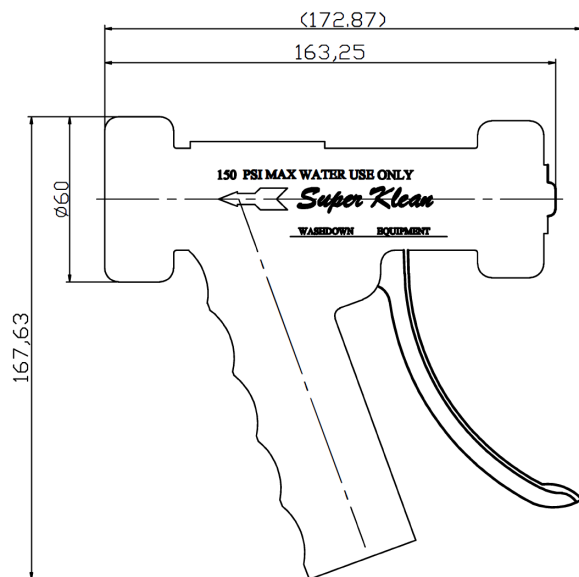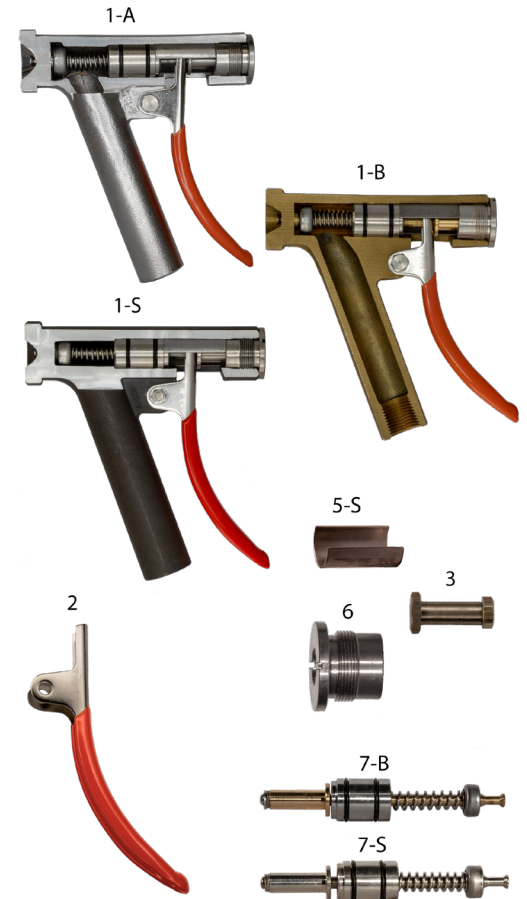

SuperKlean Washdown Products, 1 Edwards Court, Suite 101, Burlingame, CA 94010, USA

Tel: (650) 375-7001 Fax: (650) 375-7010

www.superklean.com