
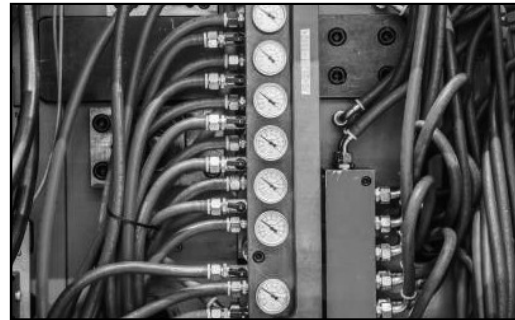


4801

MSHA PUSH-ON NBR NON-CONDUCTIVE

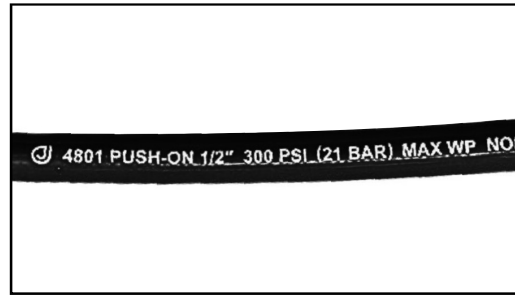

CONSTRUCTION: The tube is nitrile and cover is NBR/PVC. Reinforcement is one textile braid (aramid).

TEMPERATURE: -40°F (-40°C) to +212°F (+100°C)

BRANDING: Jason logo 4801 PUSH-ON ID 300 PSI (21BAR) MAX WP NONCONDUCTIVE MSHA IC 304/03

DESIGN FACTOR: 4:1

APPLICATION: General purpose use with air, water, and many hydraulic fluids.

FEATURES:

- MSHA cover
- Nonconductive (meet or exceed 1 Megaohm per inch of hose length (12 Megaohms/ft) @ 1000 VDC)
- Silicone free

Part Number	I.D.		O.D.		Reinf. Braids	Max. W.P. @ 68° F		Vacuum @68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	inch	mm	inch	mm		PSI	BAR		lb./ft.	KG/m	inch	mm	
4801-0025-500	1/4	6.4	0.55	14.0	1	300	20.7	n/a	0.10	0.15	2.56	65	500
4801-0038-500	3/8	9.5	0.69	17.5	1	300	20.7	n/a	0.15	0.22	2.95	75	500
4801-0050-400	1/2	12.7	0.81	20.6	1	300	20.7	n/a	0.18	0.27	4.72	120	400
4801-0063-250	5/8	15.9	0.92	23.3	1	300	20.7	n/a	0.20	0.30	5.91	150	250
4801-0075-250	3/4	19.1	1.05	26.6	1	300	20.7	n/a	0.22	0.33	6.69	170	250

Other colors are optional MTO with minimum run quantities required.

Working pressure (W.P.) is temperature dependent. See the General Information section

Table II - Pressure Re-Rating for increased Temperatures in the Industrial Hose Guide for more information.

All sizes may not be stocked in all locations. Check with customer service for availability. We disclaim any liability for use of our products in applications other than which they are designed.