


# BULK HOSE

**A**  
HOSE

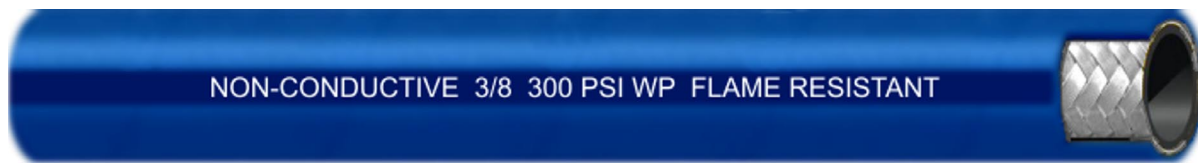

NON-CONDUCTIVE 3/8 300 PSI WP FLAME RESISTANT

**B**  
VARI-CRIMP  
COUPLINGS

## BLUE RUBBER COVERED PUSH-ON HOSE No. 024H

**Applications:** Low Pressure

**Cover:** Blue Oil Resistant Rubber

**Reinforcement:** One Fiber Braid

**Temperature:** -40 to +190F (-40 to +88C)

**Coupling Series:** Brass Push-On Couplings pg F4, Vari-Crimp pg B1

\*Cut lengths available. 100' minimum 10% Premium\*

**C**  
GRIP CRIMP  
COUPLINGS

**D**  
3 SERIES  
THERMOPLASTIC

**E**  
QUICK  
COUPLERS


**F**  
REUSABLES,  
PUSH-ON, ACCESS.

**G**  
ADAPTERS

**H**  
FABRICATION  
EQUIPMENT

**J**  
THREAD ID  
TECHNICAL

www.couplamatic.com

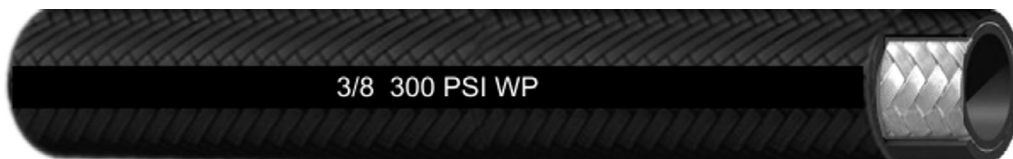

3/8 300 PSI WP

## TEXTILE COVERED PUSH-ON HOSE No. 026H

**Applications:** Low Pressure

**Cover:** Oil and Mildew Resistant Textile

**Reinforcement:** One Fiber Braid

**Temperature:** -40 to +200F (-40 to +96C)

**Coupling Series:** Brass Push-On Couplings pg F4, Vari-Crimp pg B1

\*Cut lengths available. 100' minimum 10% Premium\*

Hose I.D.	Hose O.D.	Working Pressure (Lbs.)	Min. Burst Pressure (Lbs.)	Min. Bend Radius (In.)	Weight Per Hundred Feet	Coil Footage
1/4"	0.500	300	1,200	2.5	9 lbs.	500'
3/8"	0.640	300	1,200	3	11 lbs.	500'
1/2"	0.750	300	1,200	5	13 lbs.	500'
5/8"	0.910	300	1,200	6	19 lbs.	500'
3/4"	1.031	300	1,200	7	21 lbs.	500'

Hose I.D.	Hose O.D.	Working Pressure (Lbs.)	Min. Burst Pressure (Lbs.)	Min. Bend Radius (In.)	Weight Per Hundred Feet	Reel Footage
1/4"	0.500	300	1,200	2.5	7 lbs.	500'
3/8"	0.640	300	1,200	3	10 lbs.	500'
1/2"	0.750	300	1,200	5	12 lbs.	500'
5/8"	0.910	300	1,200	6	19 lbs.	500'
3/4"	1.031	300	1,200	7	21 lbs.	500'