

SuperKlean™

Environmentally Exceptional Washdown Products

DuraSpray Spray Nozzles

- Designed for hanging hose applications (from the ceiling).
- Trigger lever to prevent accidental spraying.
- Quick connect receptacle for accessories.
- Compatible with DuraWand.

DS150S

Inlet/Outlet Diameter: ½" NPT

Nozzle Body: Stainless Steel. Epoxy resin coated.

Cartridge: Stainless Steel

Weight: 1.25 lbs

Recommended Operative Conditions

Maximum Pressure: 150 PSI

Maximum Temperature: 200 °F (93 °C)

Inlet Pressure (PSIG) Flow Rate (GPM)

High Flow

25	4.39
50	6.54
75	8.18
100	9.56
125	10.83
150	11.89

Low Flow*

25	2.93
50	3.86
75	4.91
100	5.78
125	6.71
150	7.19

*Low flow rates can be achieved with the purchase of flow restrictor adapter (Part: 8-FR-NPT)



SuperKlean™

Environmentally Exceptional Washdown Products

DuraSpray Spray Nozzles

Part #	Description
2-DSS	DuraSpray lever, stainless steel. Plastic dip
3-DS	DuraSpray nozzle lever bolt, stainless steel
4-DSDB	Nylon cover, dark blue
4-DSW	Nylon cover, white
7-DSS	Cartridge or "barrel assembly," 304 stainless steel, contains all working parts


2-DSS



7-DSS



3-DS

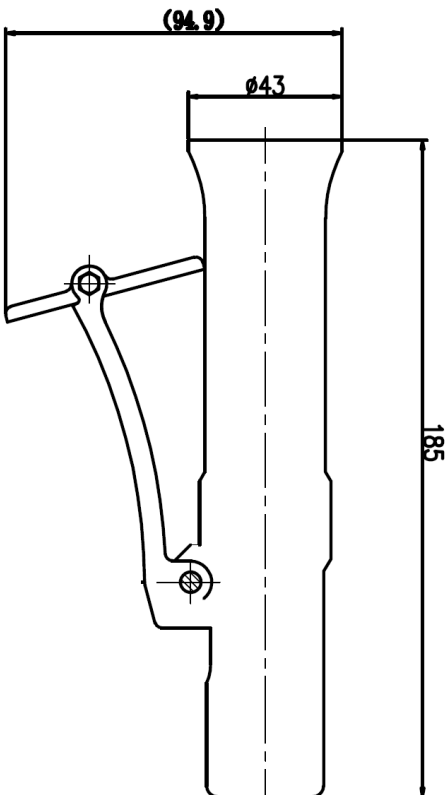

4-DSDB



4-DSW

