

Ultimate Duty Spring Retractable Reels



Air/Water/Oil - 3/4", 1", 1 1/2" I.D.

- Ideal for service trucks, permanent service, or plant work areas
- Substantial base frame – full width frame has the greatest amount of mounting area and overall strength of reels within its class
- Latch and ratchet are made of heavy duty cast aluminum to limit the opportunity for premature wear
- Reels are shipped in the bottom wind position with right hand inlet; see Hose Guide Roller Position for other options



E9399 OLPBW

Models with a ★ icon are our most popular models.

*Series G9000 reels have an external drive spring and a removable gooseneck.

| | Size Index | | | | | | | | | |
|----------|--------------------------------|-----|--------------------------------|-----|--------------------------------|-----|--------------------------------|-----|--------------------------------|-----|
| | 1 | | 2 | | 3 | | 4 | | 5 | |
| | in | mm | in | mm | in | mm | in | mm | in | mm |
| A | 26 ³ / ₈ | 670 | 26 ³ / ₈ | 670 | 26 ¹ / ₄ | 667 | 26 ¹ / ₄ | 667 | 26 ³ / ₈ | 670 |
| B | 26 ¹ / ₄ | 667 | 26 ¹ / ₄ | 667 | 26 ¹ / ₄ | 667 | 26 ¹ / ₄ | 667 | 26 ¹ / ₄ | 667 |
| C | 22 ¹ / ₄ | 565 | 22 ¹ / ₄ | 565 | 22 | 559 | 22 | 559 | 22 ¹ / ₄ | 565 |
| D | 7 ³ / ₄ | 197 | 7 ³ / ₄ | 197 | 8 | 203 | 9 ¹ / ₂ | 241 | 13 ¹ / ₂ | 343 |
| E | 12 | 305 | 13 ³ / ₈ | 340 | 14 ⁵ / ₈ | 371 | 17 ¹ / ₄ | 438 | 17 ³ / ₄ | 451 |
| F | 24 ¹ / ₈ | 613 | 24 ¹ / ₈ | 613 | 24 ¹ / ₄ | 616 | 24 ¹ / ₄ | 616 | 24 ¹ / ₈ | 613 |
| G | 4 ³ / ₄ | 121 | 4 ¹ / ₂ | 114 | 4 ⁷ / ₈ | 124 | 3 ⁷ / ₈ | 98 | 3 ⁷ / ₈ | 98 |



Series G9000

G9300 OMPBW

Additional Series 9000 Models

S.S. Fluid Path - Page 18

Stainless - Page 19


Fuel Delivery - Page 20

| Model with hose & bumper | Shipping Weight | | Hose I.D. | | Hose O.D. | | Hose Length | | Max Pressure | | NPT(M) Hose Outlet | NPT(F) Reel Inlet | NPT(F) Reel Outlet | Size Index # |
|---|-----------------|----|-----------|----|-----------|----|-------------|----|--------------|-----|--------------------|-------------------|--------------------|--------------|
| | lbs | kg | in | mm | in | mm | ft | m | psi | bar | in | in | in | |
| Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C) | | | | | | | | | | | | | | |
| E9350 OLPBW | 140 | 64 | 3/4 | 19 | 1.075 | 27 | 50 | 15 | 250 | 17 | 3/4 | 3/4 | 3/4 | 1 |
| E9375 OLPBW | 152 | 69 | 3/4 | 19 | 1.075 | 27 | 75 | 23 | 250 | 17 | 3/4 | 3/4 | 3/4 | 1 |
| E9399 OLPBW | 143 | 65 | 3/4 | 19 | 1.075 | 27 | 100 | 30 | 250 | 17 | 3/4 | 3/4 | 3/4 | 2 |
| E9450 OLPBW | 157 | 71 | 1 | 25 | 1.375 | 35 | 50 | 15 | 250 | 17 | 3/4 | 1 | 1 | 1 |
| Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C) | | | | | | | | | | | | | | |
| E9350 OMPBW | 142 | 64 | 3/4 | 19 | 1.188 | 30 | 50 | 15 | 1250 | 86 | 3/4 | 3/4 | 3/4 | 1 |

Low pressure reels supplied with PVC hose. Medium pressure reels supplied with S.A.E. 100R1-AT (3/4") one wire braid hose.

| Model without hose & bumper | Shipping Weight | | Hose Capacity | | | Max Pressure | NPT(F) Reel Inlet | NPT(F) Reel Outlet | Size Index # | | | | |
|--|-----------------|----|---------------|------|--------|--------------|-------------------|--------------------|--------------|-----|-------|-------|---|
| | lbs | kg | I.D. | O.D. | Length | | | | | | | | |
| Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C) | | | | | | | | | | | | | |
| E9305 OLPBW | 115 | 52 | 3/4 | 19 | 1.075 | 27 | 100 | 30 | 500 | 35 | 3/4 | 3/4 | 2 |
| E9400 OLPBW | 115 | 52 | 1 | 25 | 1.375 | 35 | 50 | 15 | 500 | 35 | 1 | 1 | 1 |
| FF9600 OLPBW ★ | 135 | 61 | 1 1/2 | 38 | 2.000 | 51 | 50 | 15 | 600 | 41 | 1 1/2 | 1 1/2 | 5 |
| G9600 OLPBW* | 157 | 71 | 1 1/2 | 38 | 2.000 | 51 | 50 | 15 | 600 | 41 | 1 1/2 | 1 1/2 | 4 |
| Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C) | | | | | | | | | | | | | |
| E9300 OMPBW | 117 | 53 | 3/4 | 19 | 1.188 | 30 | 50 | 15 | 3000 | 207 | 3/4 | 3/4 | 1 |
| G9300 OMPBW* | 160 | 73 | 3/4 | 19 | 1.188 | 30 | 75 | 23 | 3000 | 207 | 3/4 | 1 | 3 |
| E9400 OMPBW | 120 | 54 | 1 | 25 | 1.480 | 38 | 50 | 15 | 3000 | 207 | 1 | 1 | 1 |
| G9400 OMPBW* | 159 | 72 | 1 | 25 | 1.480 | 38 | 75 | 23 | 3000 | 207 | 1 | 1 | 3 |

Hose Guide Roller Position

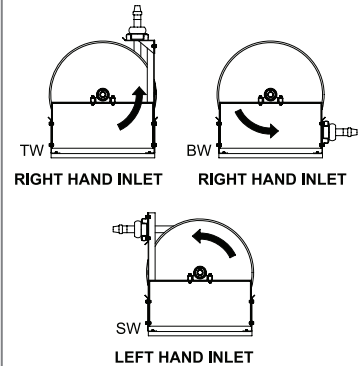

Reels are shipped in the bottom wind (BW) position. Kits are available for top wind (TW) and side wind (SW) position. Contact Reelcraft for more information.



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



Hose Assemblies & Bumper Stops

See page 37