


### F28 Standard Airline Filters

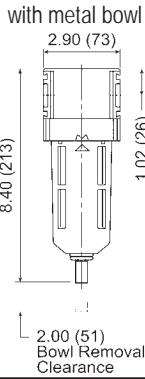


**Features:**

- high flow capacity
- 5 micron element
- 2.87 oz. bowl
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F (0°C to 52°C)**
  - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F (0°C to 65.5°C)**

Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl with Sight Glass	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
3/8"	144	<b>F28-03A</b>	<b>F28-03M</b>	<b>F28-03AMB</b>	<b>F28-03MMB</b>
1/2"	160	<b>F28-04A</b>	<b>F28-04M</b>	<b>F28-04AMB</b>	<b>F28-04MMB</b>
3/4"	165	<b>F28-06A</b>	<b>F28-06M</b>	<b>F28-06AMB</b>	<b>F28-06MMB</b>

### F30 Jumbo Airline Filters




**Features:**

- 5 micron element
- 2 oz. bowl
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F (0°C to 52°C)**
  - metal bowl: **200 PSIG** (13.8 bar) and **32°F to 150°F (0°C to 65.5°C)**

Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl with Sight Glass	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
3/4"	316	<b>F30-06A</b>	<b>F30-06M</b>	<b>F30-06AMB</b>	<b>F30-06MMB</b>
1"	323	<b>F30-08A</b>	<b>F30-08M</b>	<b>F30-08AMB</b>	<b>F30-08MMB</b>

### F35 Jumbo Airline Filters



**Features:**

- 5 micron element
- 12.5 oz. bowl
- maximum operating conditions:
  - metal bowl: **150 PSIG** (10.3 bar) and **32°F to 150°F (0°C to 65.5°C)**

Size	Flow (SCFM)	Heavy Duty Metal Bowl	
		Automatic Drain Part #	Manual Drain Part #
1 1/2"	1280	<b>F35-0BAMB</b>	<b>F35-0BMMB</b>
2"	1400	<b>F35-0CAMB</b>	<b>F35-0CMMB</b>

See pages 401 to 405 for accessories.

**!** FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.