

PRESSURE WASHER HOSE

1 WIRE COMPACT 4000 PSI PRESSURE WASHER HOSE

MAVERICK GPWH



4000 PSI WORKING PRESSURE

Built to handle demanding pressure washer applications.



ABRASION, OZONE, OIL & WEATHER RESISTANT

Durable cover for long hose life in harsh environments.



ONE WIRE BRAID REINFORCEMENT

High tensile steel wire for strength and reliability.



WIDE TEMPERATURE RANGE

Performs in hot or cold conditions.



IDEAL FOR COLD & HOT WATER APPLICATIONS


Perfect for cleaning equipment, vehicles, and industrial use.

Part No	Description	Assembly	Hose OD		Working Pressure		Burst Pressure		Bend radius		Weight	
			inch	mm	psi	bar	psi	bar	inch	mm	lbs/ft	kg/m
GPWH-50	3/8" x 50' Assembly	3/8" Male NPT Rigid X 3/8" Male NPT Swivel	.63"	15.9	4000	275	13050	900	2.56	65	0.19	0.28
GPWH-100	3/8" x 100' Assembly	3/8" Male NPT Rigid X 3/8" Male NPT Swivel	.63"	15.9	4000	275	13050	900	2.56	65	0.19	0.28

Note: Specifications are typical values and subject to change without notice.

- Tube** : Synthetic rubber resistant against cold and hot water with common cleaning applications.
- Cover** : Abrasion, ozone, oil and weather resistant synthetic rubber.
- Reinforcement** : One wire braid of high tensile steel wire.
- Temperature** : +41°F to +311°F
(+5°C to +155°C)

Fittings – 7 Series

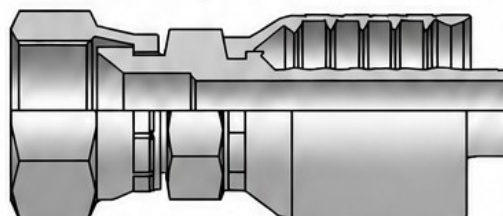

MAVERICK
— HOSE —



SALES@MAVERICKHOSE.COM



WWW.MAVERICKHOSE.COM

