


## T350LL / T350LH 225 PSI Premium Paper Mill/Creamery Wash Down Hose – No Nozzle

**3-A**  
COMPLIANT MATERIAL

**T350LL**  
White Cover

**T350LH**  
Red Cover

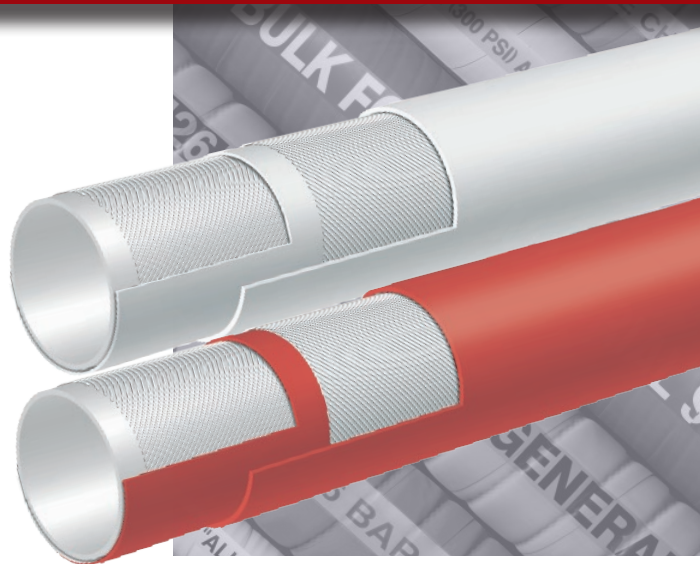

### Applications:

For general wash down service, using hot water or low pressure saturated steam in processing plants and facilities and in food and dairy plants.

### Cover:

Red EPDM – heat, abrasion and ozone resistant.  
White EPDM – heat, abrasion and ozone resistant.

### Reinforcement:

High tensile textile cords.

### Tube:

White EPDM. Meets FDA and 3A (18-03) requirements.

### Working Pressure:

Constant Pressure – 15 Bar (225 PSI)

### Steam Pressure:

Constant Pressure – 6 Bar (90 PSI)

### Temperature Range:

Water -40°F (-40°C) to 248°F (+120°C)  
Steam 330°F to (+165°C)

### Branding:

ALFAGOMMA – ITALY – T350 6 BAR (90 PSI) STEAM  
15 BAR (225 PSI) HOT WATER (embossed)

### Standard Length:

200 feet – eliminates bulky hookups

\*T350 fully complies with the requirements listed in FDA CFR21.

Nominal Specifications						
Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Weight (lbs./ft.)
T350LL050	1/2	13	0.91	23	225	0.27
T350LL062	5/8	16	1.02	26	225	0.31
T350LL075	3/4	19	1.22	31	225	0.44
T350LL100	1	25	1.46	37	225	0.54
T350LL125	1 1/4	32	1.81	46	225	0.63
T350LL150	1 1/2	38	2.05	52	225	0.74
T350LL200	2	51	2.64	67	225	1.12
T350LH075	3/4	19	1.22	31	225	0.44
T350LH100	1	25	1.46	37	225	0.54

### COUPLING SUGGESTIONS

Short shank, long shank couplings (NPT, GHT), barbed inserts attached with bands.