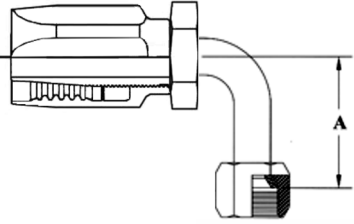
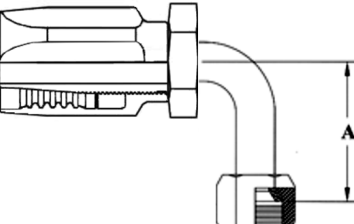


REUSABLE COUPLINGS - 100R5

Reusable & Field Attachable Hose ends for 100R5 (R5) and High Temp 100R5 (HTR5)

Non-Mandrel and No Skive

Trivalent Zinc Plating

		R5 Reusables JIC 37° - 90° Female Swivel					
A HOSE		Hose I.D.	Thread Size	Tube OD	A-Drop Inches	Hose Type	Part No.
B VAR-CRIMP COUPLINGS		3/16" (#4)	7/16-20	1/4"	0.69	100R5	4R5-4FJ90
C GRIP CRIMP COUPLINGS		5/16" (#6)	9/16-18	3/8"	0.84	100R5	6R5-6FJ90
		13/32" (#8)	3/4-16	1/2"	1.09	100R5	8R5-8FJ90
		R5 Reusables SAE 45° - 90° Female Swivel					
D 3 SERIES THERMOPLASTIC		Hose I.D.	Thread Size	Tube OD	A-Drop Inches	Hose Type	Part No.
E QUICK COUPLERS		5/16" (#6)	5/8-18	3/8"	0.84	100R5	6R5-6FS90
F REUSABLES, PUSH ON, ACCESS.							
G ADAPTERS							
H FABRICATION EQUIPMENT							
J THREAD ID TECHNICAL							
Assembly Instructions:							
Reusable Hose Ends: <ol style="list-style-type: none"> Screw socket onto hose (left hand thread) until hose bottoms. Back out 1/4 turn. Lubricate insert threads and I.D. of hose. Screw insert into socket until insert hex touches socket. 							
WWW.COUPPLAMATIC.COM							